

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
PATENT APPLICATION

Appl. No. : 10/674,771  
Applicant : Mark Visokay et al.  
Filed : September 30, 2003  
TC/A.U. : 2812  
Examiner : Kennedy, Jennifer M

Confirmation No. 4450

Docket No. : TI-35943  
Customer No. : 23494

Commissioner for Patents  
P. O. Box 1450  
Alexandria, VA 22313-1450

CERTIFICATE OF MAILING OR TRANSMISSION

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage for First Class Mail in an envelope addressed to: Commissioner for Patents, Alexandria, VA 22313-1450 or is being facsimile transmitted on the date indicated below.

2-15-2006  
Jackie McBride  
Jackie McBride

**DECLARATION UNDER 37 C.F.R. 1.131**

Sir:

YINGSHENG TUNG declares as follows:


1. THAT I am a legal representative of MARK VISOKAY and LUIGI COLOMBO in the subject application for Letters Patent;

2. THAT the applicants conceived the invention as set forth in the subject application for Letters Patent in the United States prior to September 18, 2003 and continually worked on the subject invention up to their reduction to practice as well as up to the filing of the instant application Serial No. 10/674,771, filed September 30, 2003, all in the United States;

3. THAT they reduced the invention to practice as disclosed in the subject application in the United States prior to September 18, 2003;


4. THAT all redacted dates on the attached pages of the invention disclosure are prior to September 18, 2003.

I declare under penalty of perjury that the above stated facts are true and correct on information and belief.

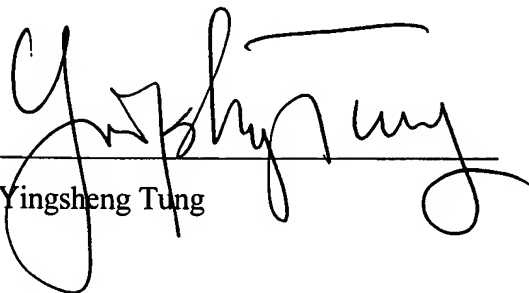  
Yingsheng Tung

2-15-2006  
Date

Texas Instruments Incorporated  
P. O. Box 655474, M/S 3999  
Dallas, Texas 75265  
(972) 917-5355

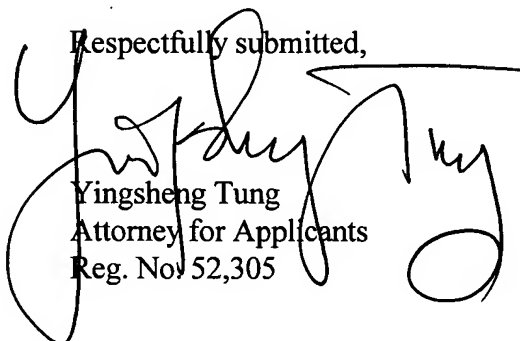Respectfully submitted,  
  
Yingsheng Tung  
Attorney for Applicants  
Reg. No. 52,305



**TI-35943**

# **Gate stack structure incorporating a single silicide for CMOS dual work function metal gates**

**Mark Visokay**

**Luigi Colombo**

**L. Colombo**

TI Proprietary Information – Internal Data

**INNOVATE. CREATE. MAKE THE DIFFERENCE.™**





# Background/problem statement

- It is desirable to replace poly-Si with metal gates in order to eliminate poly depletion, decrease Tox inversion and therefore improve drive current and performance.
- For CMOS metal gate technology, it is desirable to have tunable work functions (one value for NMOS and one for PMOS)
- Integration of two metals in a CMOS device is challenging from an integration perspective so it is desirable to use a single starting material and then modify it locally in the N & PMOS regions to provide differentiated work functions
- Channel engineering can be used to adjust the  $V_t$  for a midgap electrode, but this would be a difficult and risky channel engineering approach

L. Colombo

TI Proprietary Information – Internal Data

INNOVATE. CREATE. MAKE THE DIFFERENCE.™



TEXAS INSTRUMENTS




## Solution: e.g $\text{MoSi}_2$

- A representative stack would be 10 nm  $\text{MoSi}_2$  under 70 nm poly-Si
- During the salicide loop, a NiSi layer would be formed on top of the poly-Si, allowing the gate sheet resistance spec to be met
- If desired, the  $\text{MoSi}_2$  layer could be made thicker in order to allow consumption of all the poly-Si during the Salicide formation, thereby eliminating the poly-Si in the stack





# Solution

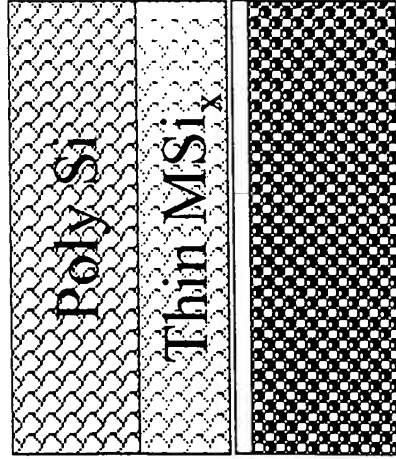

MSi<sub>x</sub> - is thermally stable on gate dielectric  
M = W, Ta, Mo, Ti

Refractory silicides are etchable

WSi<sub>2</sub>, WSi<sub>2,x</sub>  
TaSi<sub>2</sub>, TaSi<sub>2,x</sub>  
MoSi<sub>2</sub>, MoSi<sub>2,x</sub>

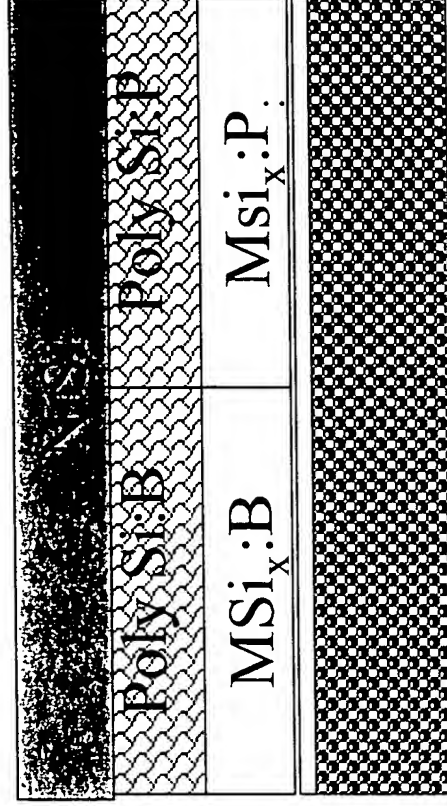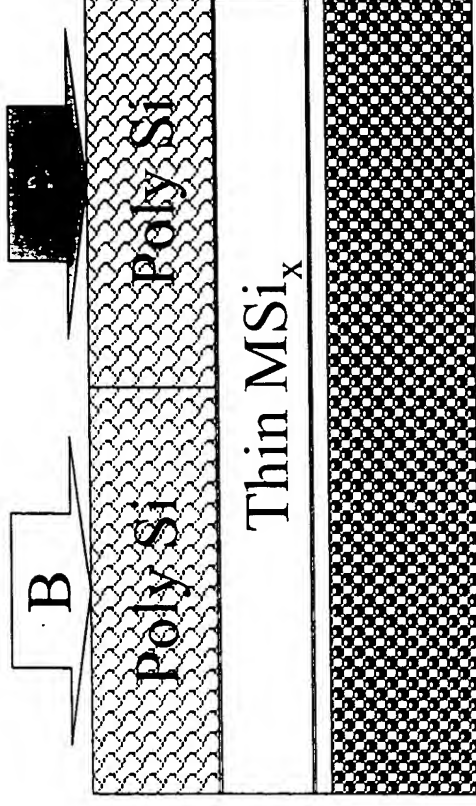

L. Colombo

TI Proprietary Information – Internal Data

INNOVATE. CREATE. MAKE THE DIFFERENCE.™

